


Small Signal Zener Diodes



SOT-323

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 2.4V~43V
- V_Z -tolerance $\pm 5\%$ approximately
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-323
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Power Dissipation	P_D	mW	200
Storage Temperature Range	T_{stg}	$^\circ\text{C}$	-55~+150
Junction Temperature	T_J	$^\circ\text{C}$	-55~+150
Maximum Regulator Current	I_{ZM}	mA	P_D / V_Z
Maximum Forward Voltage ($I_F=10\text{mA}_{dc}$)	V_F	V	0.9
Thermal Resistance Junction to Ambient Air*	$R_{\theta JA}$	$^\circ\text{C} / \text{W}$	625

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BZX84C2V4WQ THRU BZX84C39WQ	F2	Approximate 0.006	3000	30000	120000	7" reel



BZX84C2V4WQ THRU BZX84C39WQ

■ Electrical Characteristics (T_a=25℃ Unless otherwise specified)







Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/℃		Test Current I _{ZTC} mA
		min.	typ.	max.		I _{zt} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min	Max	
BZX84C2V4WQ	KRB	2.28	2.4	2.56	5	5	100	1.0	600	50	1.0	-3.5	0	5
BZX84C2V7WQ	KRC	2.5	2.7	2.9	5	5	100	1.0	600	20	1.0	-3.5	0	5
BZX84C3V0WQ	KRD	2.8	3.0	3.2	5	5	95	1.0	600	10	1.0	-3.5	0	5
BZX84C3V3WQ	KRE	3.1	3.3	3.5	5	5	95	1.0	600	5	1.0	-3.5	0	5
BZX84C3V6WQ	KRF	3.4	3.6	3.8	5	5	90	1.0	600	5	1.0	-3.5	0	5
BZX84C3V9WQ	KRG	3.7	3.9	4.1	5	5	90	1.0	600	3	1.0	-3.5	0	5
BZX84C4V3WQ	KRH	4.0	4.3	4.6	5	5	90	1.0	600	3	1.0	-3.5	0	5
BZX84C4V7WQ	KR1	4.4	4.7	5.0	5	5	80	1.0	500	3	2.0	-3.5	0.2	5
BZX84C5V1WQ	KR2	4.8	5.1	5.4	5	5	60	1.0	480	2	2.0	-2.7	1.2	5
BZX84C5V6WQ	KR3	5.2	5.6	6.0	5	5	40	1.0	400	1	2.0	-2	2.5	5
BZX84C6V2WQ	KR4	5.8	6.2	6.6	5	5	10	1.0	150	3	4.0	0.4	3.7	5
BZX84C6V8WQ	KR5	6.4	6.8	7.2	5	5	15	1.0	80	2	4.0	1.2	4.5	5
BZX84C7V5WQ	KR6	7.0	7.5	7.9	5	5	15	1.0	80	1	5.0	2.5	5.3	5
BZX84C8V2WQ	KR7	7.7	8.2	8.7	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5
BZX84C9V1WQ	KR8	8.5	9.1	9.6	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5
BZX84C10WQ	KR9	9.4	10	10.6	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5
BZX84C11WQ	KP1	10.4	11	11.6	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5
BZX84C12WQ	KP2	11.4	12	12.7	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5
BZX84C13WQ	KP3	12.4	13	14.1	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5
BZX84C15WQ	KP4	13.8	15	15.6	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5
BZX84C16WQ	KP5	15.3	16	17.1	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5
BZX84C18WQ	KP6	16.8	18	19.1	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5
BZX84C20WQ	KP7	18.8	20	21.2	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5
BZX84C22WQ	KP8	20.8	22	23.3	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5
BZX84C24WQ	KP9	22.8	24	25.6	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5
BZX84C27WQ	KPA	25.1	27	28.9	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2



BZX84C2V4WQ THRU BZX84C39WQ

BZX84C30WQ	KPB	28	30	32	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2
BZX84C33WQ	KPC	31	33	35	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2
BZX84C36WQ	KPD	34	36	38	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2
BZX84C39WQ	KPE	37	39	41	2	2	130	0.5	350	0.1	27.3	33.4	41.2	2


■ Characteristics (Typical)

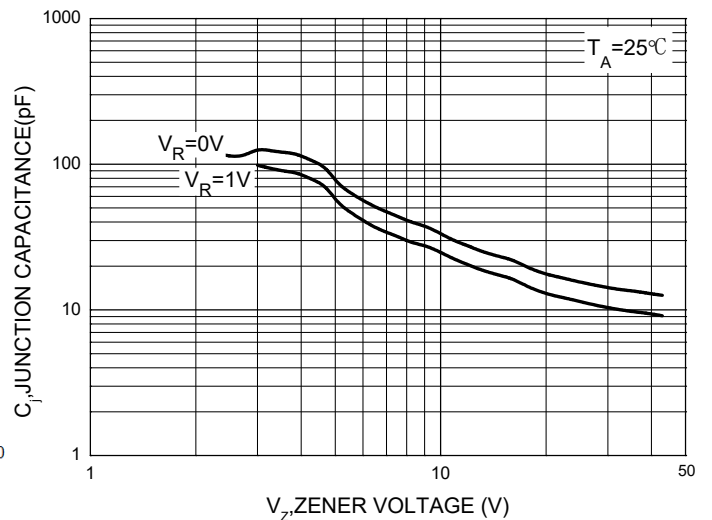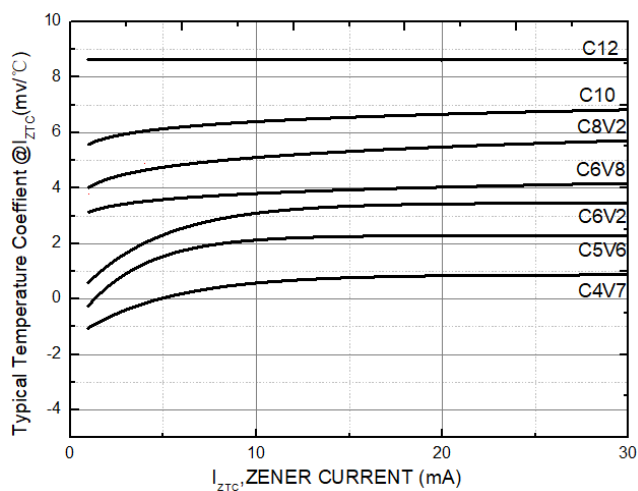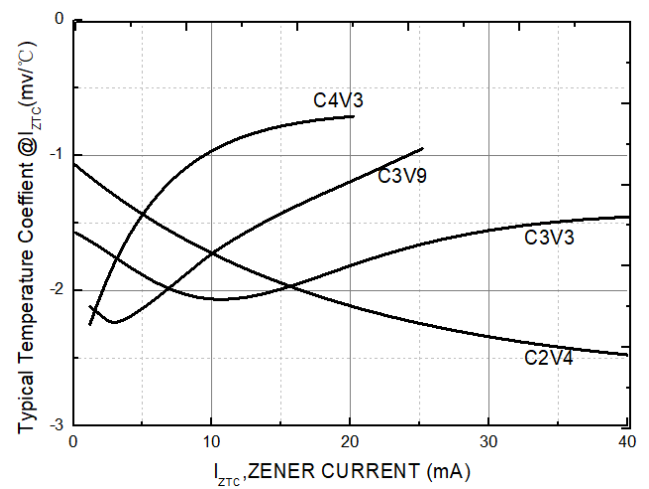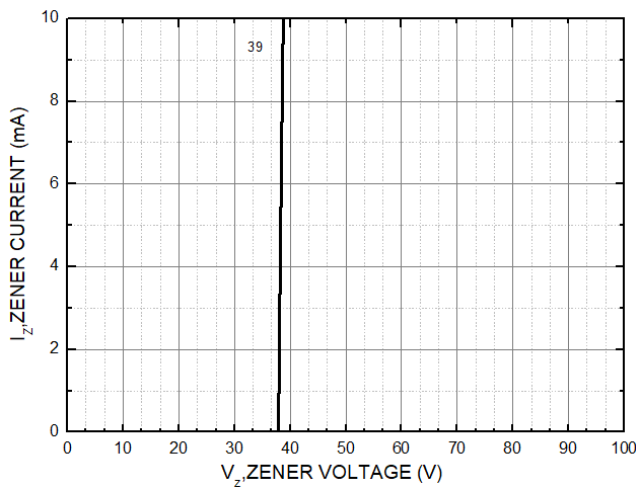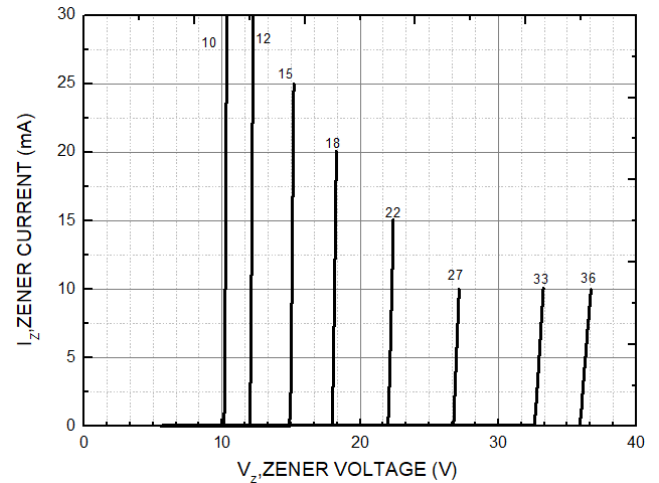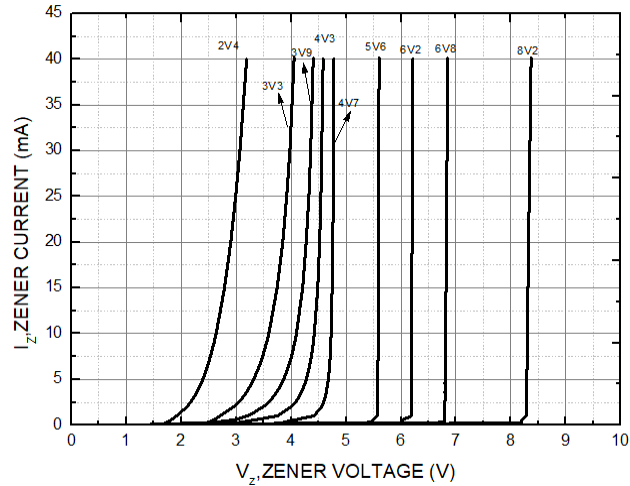




BZX84C2V4WQ THRU BZX84C39WQ


■ Outline Dimensions




TOP VIEW

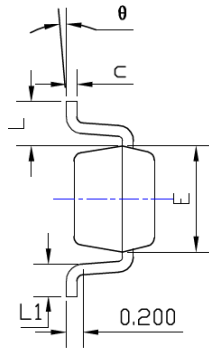

SIDE VIEW



SIDE VIEW



UNIT: mm

SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.006	0.016	0.150	0.400
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e	0.026 TYP		0.650 TYP	
e1	0.047	0.055	1.200	1.400
L	0.021 REF		0.525 REF	
L1	0.010	0.018	0.260	0.460
theta	0°	8°	0°	8°

NOTE:

1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



BZX84C2V4WQ THRU BZX84C39WQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.