

SiC Diode Power Module




V_{DC}	1200V
I_F	2×60A
$T_{J,max}$	175°C

Applications

- Welding equipment
- Uninterruptible power supply (UPS)
- High frequency power supply
- Induction heating
- High speed rectifiers

Features

- SiC Schottky Diode
 - Zero reverse recovery
 - Zero forward recovery
 - Temperature independent switching behavior
 - Positive temperature coefficient on V_F
- Very low stray inductance
- Low forward voltage
- Isolated package (SOT-227)
- Low noise switching
- RoHS compliant

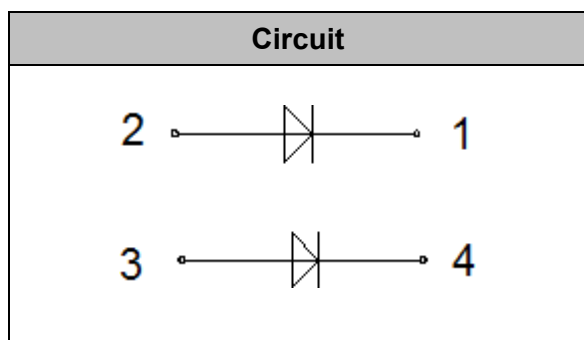

■ Absolute Maximum Ratings ($T_J=25^\circ\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	VALUE	UNIT
Peak Repetitive Reverse Voltage	V_{RRM}	$T_J=25^\circ\text{C}$	1200	V
DC Blocking Voltage	V_{DC}	$T_J=25^\circ\text{C}$	1200	V
Continuous Forward Current	I_F	$T_C=25^\circ\text{C}, T_J=175^\circ\text{C}$	117	A
		$T_C=125^\circ\text{C}, T_J=175^\circ\text{C}$	60	
		$T_C=135^\circ\text{C}, T_J=175^\circ\text{C}$	51	
Non-Repetitive Peak Forward Surge Current	I_{FSM}	$T_C=25^\circ\text{C}, T_P=10\text{ms}, \text{Half Sine Wave}$	430	A
I^2t Value	$\int I^2 dt$	$T_C=25^\circ\text{C}, T_P=10\text{ms}$	920	A^2s
Power Dissipation	P_{Tot}	$T_C=25^\circ\text{C}$	325	W
Operating Junction Temperature	$T_{J,op}$		-55...175	$^\circ\text{C}$
Storage Temperature	T_{STG}		-55...175	$^\circ\text{C}$



MB120DU12ST

■ Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise specified)

PARAMETER	Symbol	TEST CONDITIONS	VALUE			UNIT
			Min.	Typ.	Max.	
Reverse Current	I_R	$V_R=1200\text{V}$, $T_J=25^{\circ}\text{C}$	--	3.6	100	μA
		$V_R=1200\text{V}$, $T_J=175^{\circ}\text{C}$	--	13.4	--	
Forward Voltage	V_F	$I_F=60\text{A}$, $T_J=25^{\circ}\text{C}$	--	1.39	1.7	V
		$I_F=60\text{A}$, $T_J=175^{\circ}\text{C}$	--	1.86	--	
Total Capacitance	C	$V_R=1\text{V}$, $f=1\text{MHz}$	--	3650	--	pF
		$V_R=400\text{V}$, $f=1\text{MHz}$	--	321	--	
		$V_R=800\text{V}$, $f=1\text{MHz}$	--	240	--	
Total Capacitive Charge	Q_C	$V_R=800\text{V}$	--	340	--	nC
Capacitance Stored Energy	E_C	$V_R=800\text{V}$	--	88	--	μJ

■ Thermal and Package Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	VALUE			UNIT
			Min.	Typ.	Max.	
Thermal Resistance, Junction to Case	R_{thJC}	Per leg		0.46		$^{\circ}\text{C/W}$
Isolation Breakdown Voltage	V_{isol}	AC, 50Hz (R.M.S), $t=1\text{min}$	3000			V
Mounting Torque	M	Recommended (M4 screw)	1.1		1.5	Nm
Terminal Connection Torque		Recommended (M4 screw)	1.1		1.5	
Weight	W			25		g



■ Typical Performance Per Leg

Fig1. Forward Characteristics

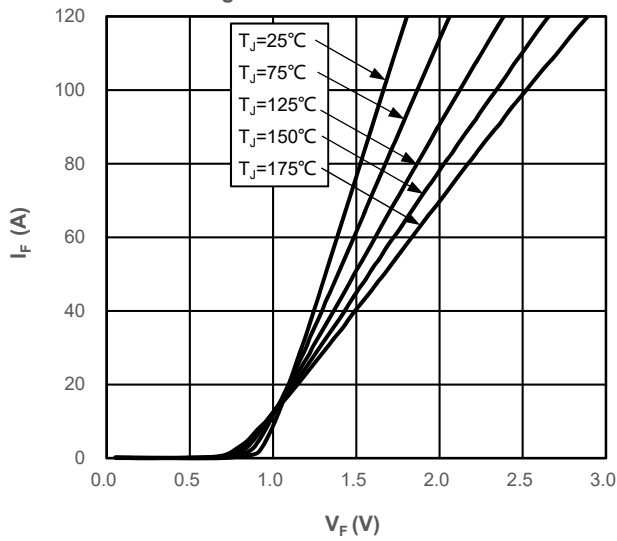


Fig2. Reverse Characteristics

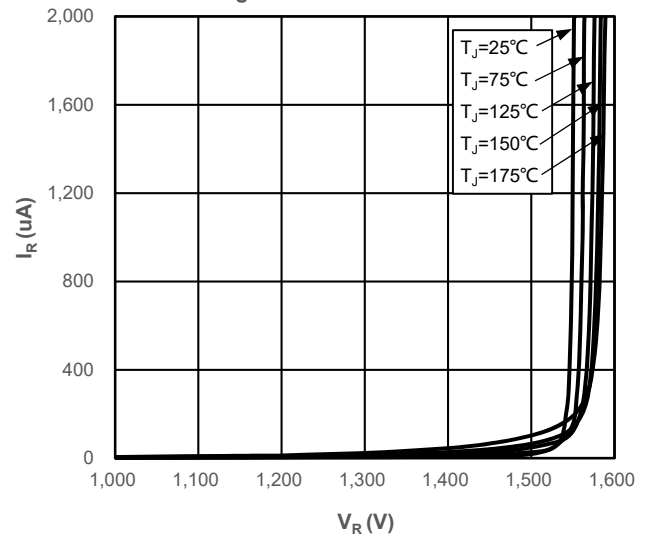


Fig3. Current Derating

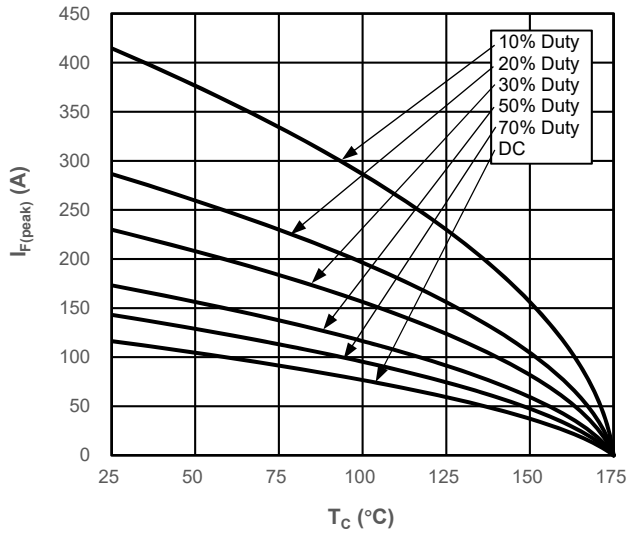


Fig4. Power Derating

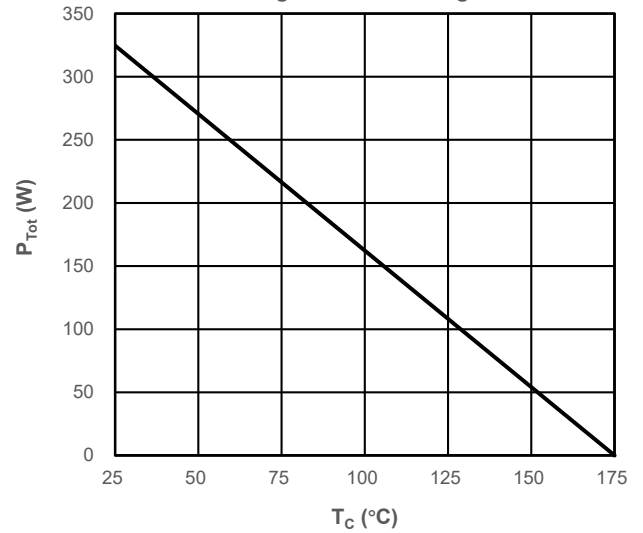


Fig5. Recovery Charge vs. Reverse Voltage


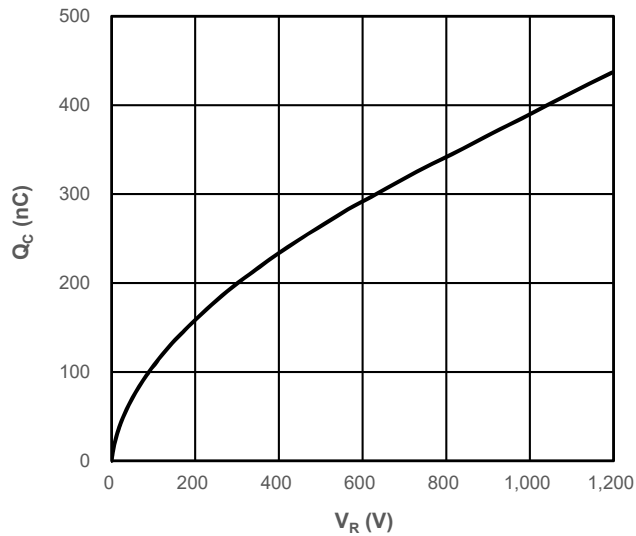


Fig6. Capacitance vs. Reverse Voltage



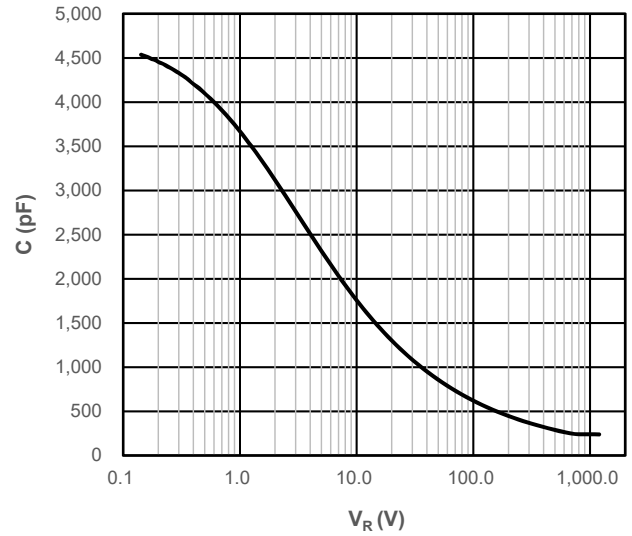

MB120DU12ST

Fig7. Typical Capacitance Stored Energy


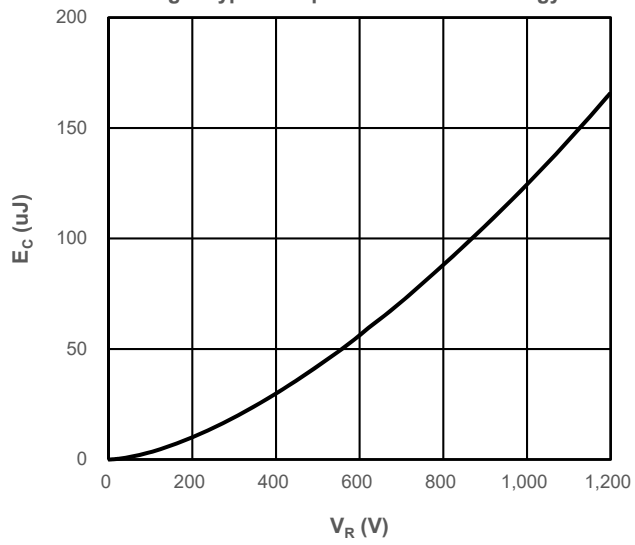


Fig8. Transient Thermal Impedance




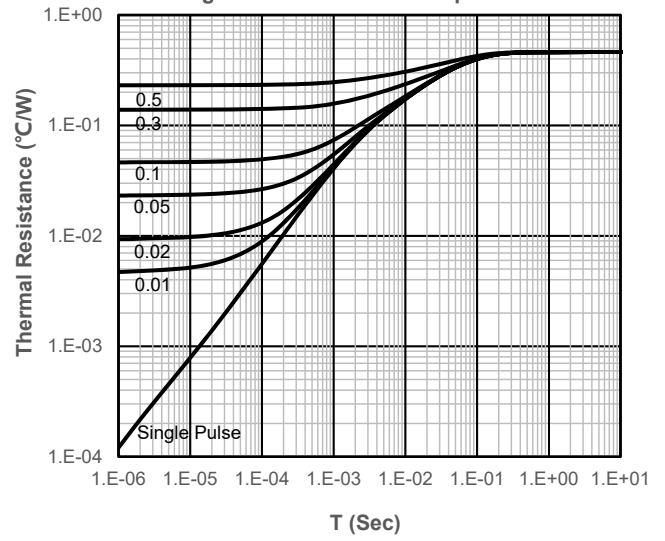

MB120DU12ST

■ Package Outline Information

CASE: ST

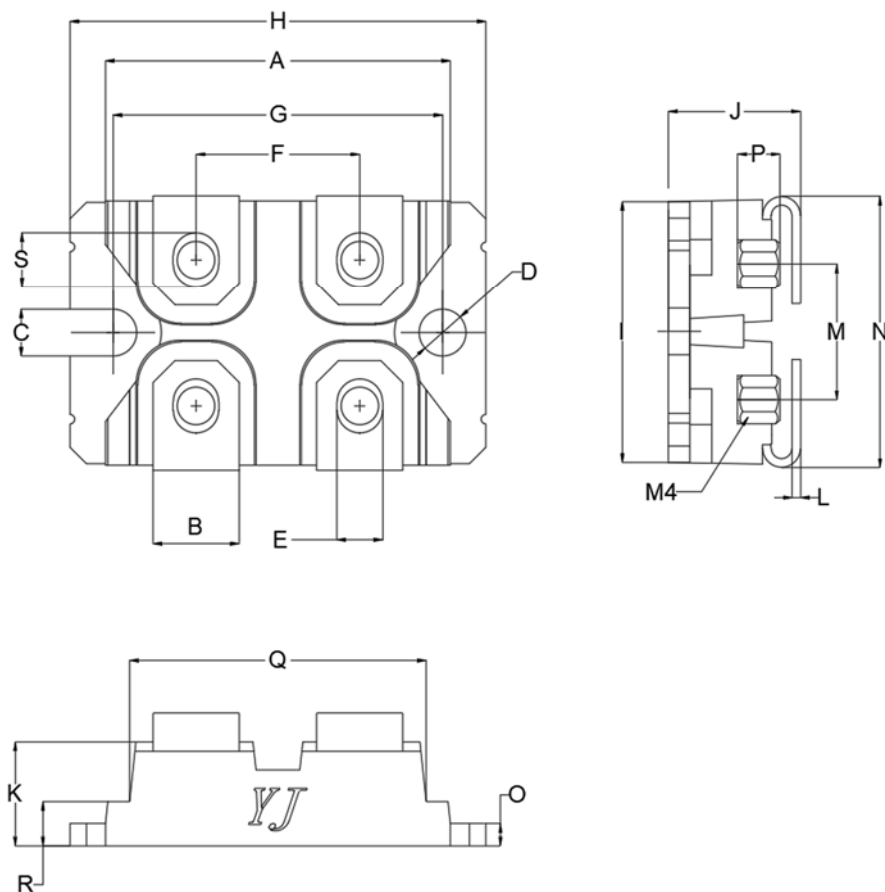

DIM	Millimeter	
	min	max
A	31.40	31.60
B	7.70	8.10
C	4.20	4.40
D	4.20	4.40
E	4.10	4.30
F	14.90	15.10
G	30.10	30.40
H*	38.00	38.40
I	23.80	24.20
J*	12.20	12.70
K*	9.40	9.60
L	0.75	0.85
M	12.40	12.80
N*	24.50	25.40
O*	1.90	2.10
P	3.10	3.95
Q*	26.60	27.00
R*	3.80	4.20
S	5.10	5.40

Marked * is primary/accent size



MB120DU12ST

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.